


newline

Quick Start

Newline Click2Cast



1. Appearance

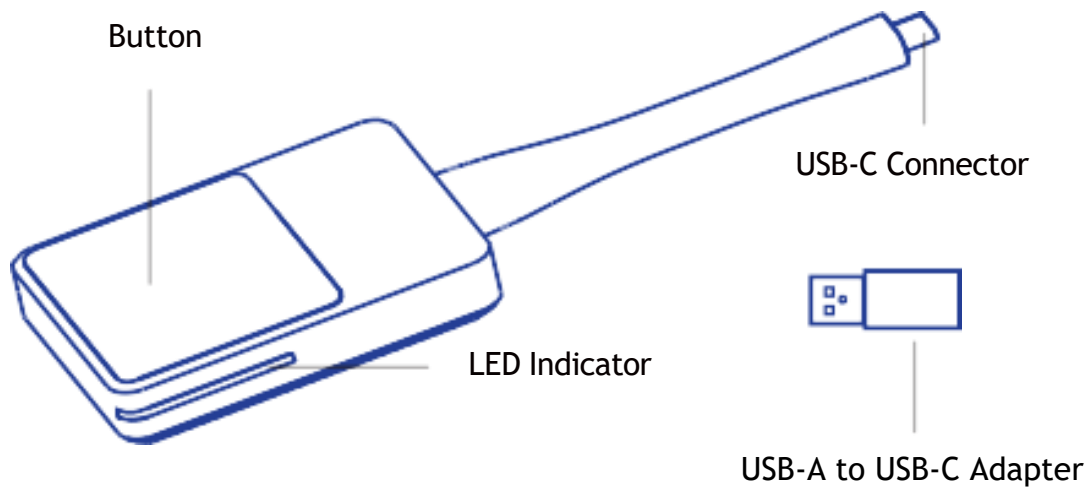

- **Type-C Connector** - Used to connect Newline Click2Cast Button to a large display or PC.
- **Button** -Used to start or stop video/audio sharing from the PC to the large display.
- **USB to USB-C Adapter** - Used to connect and pair with a large display without USB-C interface.
- **LED Indicator**

Indicator	Button Status
Off	Not inserted into any PC or endpoints.
Blinking green	Pairing or connecting to the large display.
Solid green	Ready for screen sharing.
Solid blue	Pairing complete or sharing screen.
Blinking red	Failed to pair or connect to the large display.
Blinking yellow	The Newline Click2Cast button is upgrading.

2. Pairing

REQUIREMENT : Newline Cast+ is installed and activated on the large display. You can pair the Newline Click2Cast Button with the large display in the following ways.

I. Automatic pairing

Be sure that the Wi-Fi hotspot is enabled on the display, launch Newline Cast+, plug Newline Click2Cast Button into the USB-A/USB-C port of the display, wait for the pairing complete message to appear on the screen, then unplug it.

II. Manual pairing

If the Wi-Fi hotspot is not available on your display, please launch Newline Cast+, plug Newline Click2Cast Button into the USB-A/USB-C port of the display, a manual pairing window will pop up, enter the Wi-Fi SSID and password, then tap OK to complete the pairing.

3. Share Screen

I. Plug the Newline Click2Cast Button into the laptop via Type-C port and wait for LED from blinking to solid blue. Tap the button to start screen sharing.

II. Extend display mode

For Windows, press “Win+P” to switch the display mode to PC screen only, Duplicate, Extend, Second screen only.

For macOS, launch System Preferences > Displays > Select BYOM 4K, choose the projection mode according to your needs, e.g. as Separate Display, Mirror Built-in Retina Display.

4. BYOM (Bring Your Own Meeting)

REQUIREMENT: Microphone, camera, and speaker are available on your display.

Guides to use BYOM:

- I. Plug the Newline Click2Cast Button into the laptop and wait for LED from blinking to Solid blue.
- II. Use video conferencing software (such as Zoom/ Teams/Skype/Google Meet...) to join /host a meeting, and choose BYOM camera, BYOM microphone, BYOM speaker, you will be able to directly use the A/V equipments on the large display to conduct video conferences.


5. Cautions

- I. Please ensure Newline Click2Cast has been activated on the display. If not, the Newline Click2Cast Button will not work.
- II. The 2.4Ghz Wi-Fi frequency band is susceptible to interference from surrounding electronic devices, resulting in bad network quality and affecting user experience. Please use the Wi-Fi signal working at the 5Ghz channels for a good user experience.

6. Specifications

Item	Specifications
Power supply	5V DC from USB-C
Power consumption	3W(Typical)
Ambient temperature	<ul style="list-style-type: none"> • Operating: 0°C ~ 40°C • Storage: -15°C ~ +60°C
Relative humidity (non-condensing)	<ul style="list-style-type: none"> • Operating: 5% ~ 95% • Storage: 0% ~ 95%
Package dimensions (H x W x D)	213mm×100mm×30.3mm
Product dimensions (H x W x D)	175mm×58mm×16.5mm
Gross weight	196.5g
Net weight	80g
Wi-Fi	2.4GHz and 5GHz
Wi-Fi operating frequency bands	2412MHz ~ 2472MHz 5180MHz ~ 5240MHz

Maximum Wi-Fi power	1.6m W/MHz
Actual Wi-Fi power	2.4GHz : 1.6mW/MHz, 5GHz : 0.7mW/MHz
Resolution	Up to 4K 30 fps
OS	Windows 7/8/10/11 macOS, Chrome OS, Linux OS, Android OS, Any device supports full featured Type-C (DP Alt mod

 Note: The actual power of Wi-Fi is measured data, and the test results of different laboratories may vary.

Statement on a Class A Product

Warning: Operation of this equipment in a residential environment could cause radio interference.

Angaben zu einem Produkt der Klasse A

Warnhinweis: Der Betrieb dieses Geräts bzw. dieser Einrichtung kann im Wohnbereich Funkstörungen verursachen.

Hereby, EShare Technology Co., Ltd. declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:
<http://www.ee-share.com/en/product-certification>.

Manufacturer@EShare Technology Co., Ltd.

No.038, 2F, Block A, Longguang Century Tower, Haixiu Road, Bao'an, Shenzhen 518100

People's Republic of China

Disposal and Recycling Information



This symbol on the device and any included batteries indicates that they should not be disposed of as normal household garbage. Do not dispose of your device or batteries as unsorted

municipal waste. They should be handed over to a certified

collection point for recycling or proper disposal when they can no longer be used.

For more detailed information about the recycling of the device or batteries, contact your local city office, the household waste disposal service, or the retail store where you purchased this device.

The disposal of this device is subject to the Waste from Electrical and Electronic Equipment (WEEE) Directive of the European Union. The purpose for separating WEEE and batteries from other waste is to minimize any environmental impact and health hazards due to the presence of hazardous substances.

Reduction of Hazardous Substances

This device is compliant with the EU Registration, Evaluation, Authorization and Restriction of Chemicals (REACH) Regulation (Regulation No 1907/2006/EC of the European Parliament and of the Council) and the EU Restriction of Hazardous Substances (RoHS) Directive (Directive 2011/65/EU of the European Parliament and of the Council).

Warranty Card

Thank you for choosing our products. Please read this warranty card carefully and fill in the required information. Keep the card in a safe place. If lost it cannot be replaced.

Registry

Your Name (or Company Name):

Contact		Invoice Number	
Address		Expiration Date	
Telephone		Dealer's Name	
Product Model		Dealer's Address	
Serial Number		Dealer's Telephone	

Dealer's Seal:

Limited Warranty

We warrant the products that are purchased from authorized dealers to be free from defects in materials and workmanship, under proper use and in normal conditions, during the expressed warranty period.

Special Notice

1. The terms of warranty expressed in the purchase contract enjoy higher validity than the terms expressed within this card. This card is intended to be used solely as a warranty certificate.
2. The warranty card must be preserved in good condition and free of any scratch or alterations.
3. The warranty card must be presented to the authorized service technician when the product is being returned for repairs.

This warranty card does not cover defects caused by:

1. Modifications and alterations performed on the warranted product by parties other than authorized dealers.
2. Damage caused by using the product under inadequate operating environments.
3. Force majeure including but not limited to fires, earthquakes, lightning storms, and tsunamis.
4. Operations performed on the product unexpressed within User Guide.
5. Normal wear and tear of components, including but not limited to the shell and the power module.
6. The warranty card is altered or rendered illegible, or the product serial number recorded on the warranty card is inconsistent with the serial number imprinted or labeled on the product.

For cases not included within this limited warranty, not applicable, or where the warranty is rendered void or expired, we reserve the right to charge for the repair services should the said products be capable of being repaired.

We reserve the right to interpret this limited warranty