



i3PROJECTOR L3002UW

LASER TECHNOLOGY

EXTREME LONG LIFETIME, WITHOUT COMPROMISING ON COLORS AND BRIGHTNESS

i3PROJECTOR L3002UW is an Ultra-Wide projector without lamp! This next generation widescreen lamp-less projector offers numerous improvements over previous generations and a significantly lower total cost of ownership. Offering a brightness of 3000 lm and a light source lifetime of 20.000 hours, this is the ideal projection solution for classrooms and meeting rooms.

INTERACTIVE

- The perfect combination with an i3Board 135"

INSPIRING

- Huge image size
- Laser technology
- Lamp life 20.000hrs
- Ultra short-throw projector
- Instant On / Off (5sec)
- Green design: Mercury free
- Wide color range

INTEGRATED



- 3000 Lumen
- UW 1920x720
- Aspect ratio 16:6
- Speaker 10W
- DLP Technology

WARRANTY

- 3 years on the projector
- 3 years (max. 10.000 hours) on the light source *


*extendable to 5 years



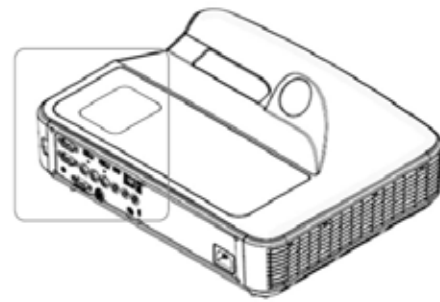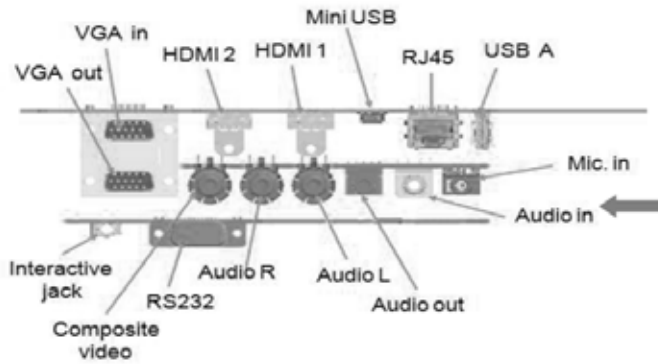

SPECIFICATIONS

Laser light source LASER with 20,000hrs lifetime		VGA audio input	Qty : 1 / 3.5mm phone jack (blue) / stereo (dedicated to selected VGA input port)
Brightness	3000 lumens	Composite audio input Qty	2 / RCA-Left (white) / RCA-Right (red) / stereo
Contrast	1,800:1 (native) / 10,000:1 (APM)	Microphone input Qty	1 / 3.5mm phone jack (pink) / mono
Resolution (native)	1920 x 720	System audio output Qty	1 / 3.5mm phone jack (green) / stereo
Aspect ratio (native)	16 : 6	RS232	Qty : 1 / DB-9 female / 9600bps Purpose : projector control
Throw ratio	0.25	Mini USB	Qty : 1 / device mode Purpose : for firmware upgrade (USB1.0) / interactive (USB2.0)
Focus range	120" - 140"	RJ45	Qty : 1 / Fast Ethernet (100Base-T) Purpose : remotely projector control (Crestron / AMX / PJ-Link) Others : video streaming
Temperature/ Humidity	Operating : 5°C ~ 40°C / 5%~90% without condensation Storage : 0°C ~60°C / 5%~95% without condensation Shipping :- 20°C ~ 60°C / 5%~95% without condensation	USB A	Qty : 1 / host mode / USB2.0 (for local playback or Wi-Fi dongle)
Temperature / Altitude	Operation 5°C~40°C @ 0~2,500 feet 5°C~35°C @ 5°C~30°C @ 5,000~10,000 feet	Speaker	1 x 10W
Thermal Protection	Auto shutdown : Ambient temperature exceeds 47±2°C Auto ECO : Ambient temperature exceeds 40°C	Power consumption	335W (Full mode), 225W (Eco mode)
Noise level	Full mode : 36dBA (typical) / 38dBA (maximum) ECO mode : 32dBA (typical) / 35dBA (maximum)	Standby power	(1) Idle without LAN wakeup : < 0.5W (2) Idle with LAN wakeup : < 8W
HDMI input	Qty : 2 (HDMI1 with MHL2.0 support) HDMI : 1.3a HDCP : 1.3 Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz)	Dimensions	Width x Depth x Height = 383mm x 308mm x 86mm
VGA input	Qty : 2 (1 sharing with VGA output by OSD setup) Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz)	Weight Net	5.5kg (12.1lb)
Composite input	Qty : 1 / RCA (yellow) Video Standard : 480i/576i	EMC	CE, FCC, CCC
VGA output	Qty : 1 (Sharing with one of VGA input by OSD setup) Loop through VGA input	Safety	TUV, UL, CCC
		Green	RoHS, WEEE, REACH
		Cable	AC power cord 3m x1 VGA cable 1.8m x1
		Remote control	
		User Manual	CD x1
		Quick Start Guide	QSG x1

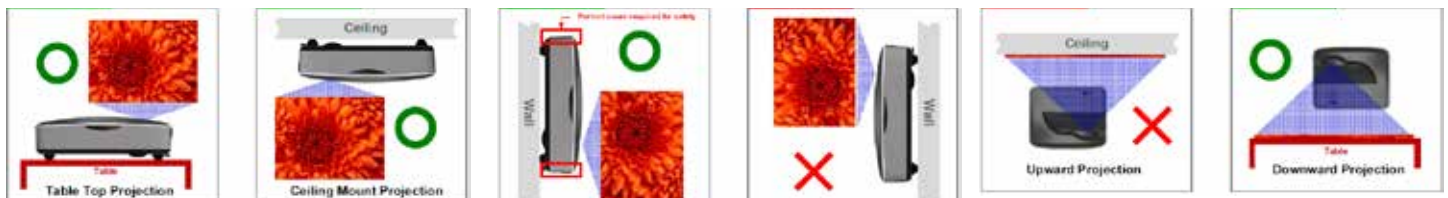

AUTHORISED DISTRIBUTOR

